

# LED PANEL VISIONAL PROFESSIONAL+



160°  
BEAM ANGLE

INSTANT  
FULL LIGHT

IES FILE IS  
AVAILABLE

PF ≥ 0.96

CRI ≥ 85

LED CHIPS  
GW JTLMS1.EM

PMAA GLASS 3mm

5 YEARS  
WARRANTY  
FOR PROJECTS

PROTECTION RATING  
IP44 / IK07

NO FLICKERING

DRIVER INCLUDED

50 000 HOURS  
EXTRA LONG LIFETIME

595x595x10mm

DEVELOPED IN EUROPE

**LED PANEL LIGHT**

3000K  
WARM WHITE

4000K  
NATURAL WHITE

6000K  
COLD WHITE

CE RoHS CB FCC EMC compliance


**POWER 40W**

**BRIGHTNESS 4800 LUMEN**

## GENERAL DESCRIPTION


LED PANEL LIGHT VISIONAL PROFESSIONAL+ combined modern technologies and clas-sical slim design. Due to advanced PMAA technology micro structure light guide plate, these panel lights are brighter than analogues. LED PANEL LIGHT VISIONAL PROFESSIONAL+ provide high energy-efficiency, extra long lifetime, has no glare-effect and no flickering effect. The ideal light for offices, shopping malls, hotels, hospitals and etc.

7

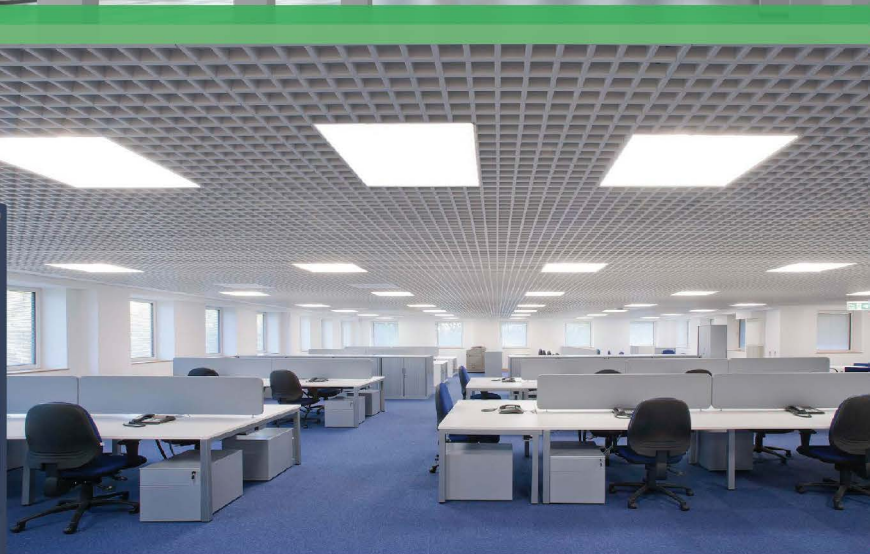

LED PANEL LIGHT VISIONAL PROFESSIONAL+ combined modern technologies and classical slim design. Due to advanced PMAA technology micro structure light guide plate, these panel lights are brighter than analogues. LED PANEL LIGHT VISIONAL PROFESSIONAL+ provide high energy-efficiency, extra long lifetime, has no glare-effect and no flickering effect. The ideal light for offices, shopping malls, hotels, hospitals and etc.

# LED PANEL VISIONAL PROFESSIONAL+

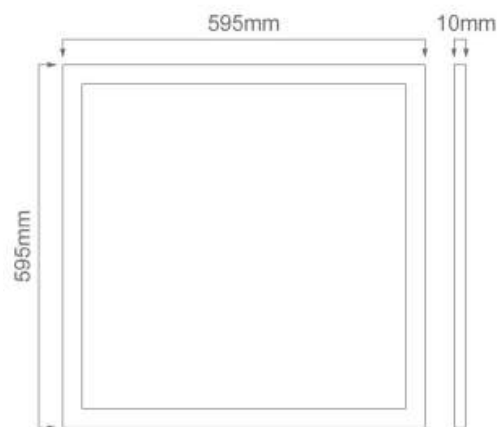

DALI  
OPTIONAL

EMC  
compliance

✓**RoHS**



## DETAILED DESCRIPTION

POWER JAUDA	40W (40kWH/1000h)
BRIGHTNESS SPILGTUMS	4800 LUMEN
POWER FACTOR PF KOEFICIENTS	PF ≥ 0.96
RA COEFFICIENT RA KOEFICIENTS	CRI ≥ 85
POWER SUPPLY EFFICIENCY ENERGOAPGĀDES EFEKTIVITĀTE	>90%
LIFETIME KALPOŠANAS ILGUMS	50000 h
COLOR TEMPERATURE KRĀSAS TEMPERATŪRA	3000K / 4000K / 6000K

BEAM ANGLE GAISMAS LĒŅĶIS	160°
SIZE IZMĒRS	595 x 595 x 10mm
DIMMABLE DIMMĒJAMS	OPTIONAL
VOLTAGE SPRIEGUMS	110-265V 50/60HZ
PROTECTION LEVEL AIZSARDZĪBAS LĪMENIS	IP 44
TEMPERATURE TEMPERATŪRA	-40C - +50C
OPTIONAL MODELS CITI MODEĻI	48W (1200 x 300 mm) 72W (1200 x 600 mm)