

LED DRIVER DALI SUPERIOR

Constant voltage LED driver with DALI dimming interface



PRODUCT BENEFITS

- Quick and comfortable installation thanks to tool-less cable clamp concept
- 5 years guarantee
- Low flickering enables high light quality as well as good visual comfort
- Push DIM application for easy control
- Suitable for emergency lighting

AREAS OF APPLICATION


- Cove lighting, even in tight spaces
- Hotels, shops, hospitality, residential interiors
- Museums, art galleries
- Strip lighting in single and open-plan offices
- Suitable for use in emergency lighting systems (DC capable)

| E-number | Product name | GTIN (EAN) | V | V _{OUT} | W | Hz | W | t _{inj} ² |
|----------|----------------------------|---------------|-----------|------------------|-------|-------|---------|-------------------------------|
| | DR DALI-SUP-45/220-240/24 | 4058075421820 | 220...240 | 24 | 45.0 | 50/60 | 1...100 | 50000 |
| | DR DALI-SUP-80/220-240/24 | 4058075421844 | 220...240 | 24 | 80.0 | 50/60 | 1...100 | 50000 |
| | DR DALI-SUP-150/220-240/24 | 4058075421868 | 220...240 | 24 | 150.0 | 50/60 | 1...100 | 50000 |

| Product name | T _a | T _c | PROTECTION CLASS | L x W x H [mm] | PRICE (EUR) ³ | Light bulb icon |
|----------------------------|----------------|----------------|------------------|-------------------|--------------------------|-----------------|
| DR DALI-SUP-45/220-240/24 | -20...+50 | 85.0 | II | 229 x 47.0 x 32.0 | | 1 |
| DR DALI-SUP-80/220-240/24 | -20...+45 | 85.0 | II | 330 x 47.0 x 32.0 | | 2 |
| DR DALI-SUP-150/220-240/24 | -20...+45 | 85.0 | II | 330 x 47.0 x 32.0 | | 3 |

LED DRIVER SUP

Constant voltage LED driver

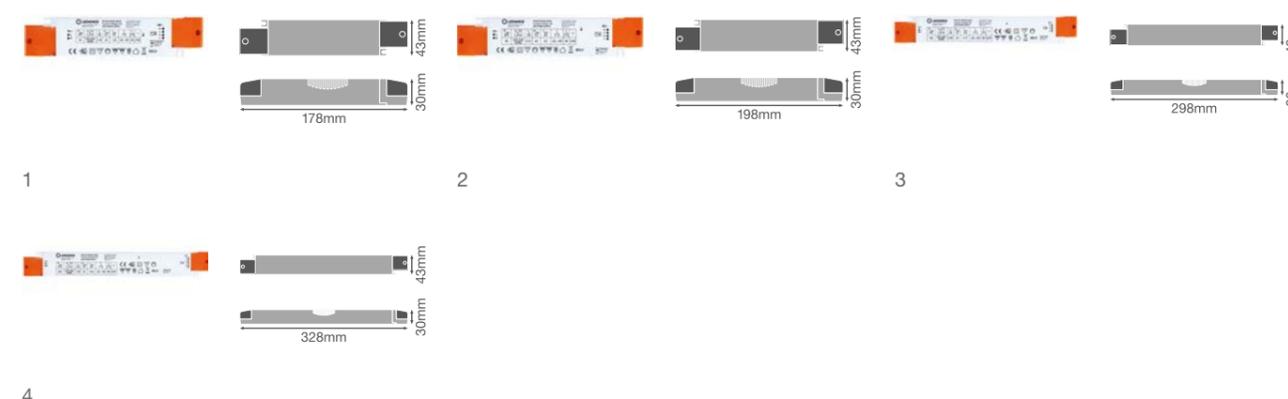

PRODUCT BENEFITS

- Perfectly matched to 24 V LED flexible strips
- Long reliable life at maximum permitted temperatures
- 5 years guarantee
- Maintenance-free operation and minimal installation costs
- Quick and simple installation
- High efficiency and reliability

AREAS OF APPLICATION

- Cove lighting, even in tight spaces
- Wallwasher effect lighting in living rooms, dining rooms, bedrooms, entrances
- Offices, shopping centers, hospitals, restaurants, hotels
- For indoor SELV installations

| E-number | Product name | GTIN (EAN) | V | V _{OUT} | W | Hz | W | t _{inj} |
|----------|-----------------------|---------------|-----------|------------------|-------|-------|---|------------------|
| | DR-SUP-30/220-240/24 | 4058075437784 | 220...240 | 24 | 30.0 | 50/60 | - | 60000 |
| | DR-SUP-60/220-240/24 | 4058075437807 | 220...240 | 24 | 60.0 | 50/60 | - | 60000 |
| | DR-SUP-100/220-240/24 | 4058075437821 | 220...240 | 24 | 100.0 | 50/60 | - | 60000 |
| | DR-SUP-200/220-240/24 | 4058075437845 | 220...240 | 24 | 200.0 | 50/60 | - | 60000 |

| Product name | T _a | T _c | PROTECTION CLASS | L x W x H [mm] | PRICE (EUR) ³ | Light bulb icon |
|-----------------------|----------------|----------------|------------------|-------------------|--------------------------|-----------------|
| DR-SUP-30/220-240/24 | -20...+55 | 80.0 | II | 178 x 43.0 x 30.0 | | 1 |
| DR-SUP-60/220-240/24 | -20...+55 | 90.0 | II | 198 x 43.0 x 30.0 | | 2 |
| DR-SUP-100/220-240/24 | -20...+55 | 85.0 | II | 298 x 43.0 x 30.0 | | 3 |
| DR-SUP-200/220-240/24 | -20...+55 | 90.0 | II | 328 x 73.0 x 30.0 | | 4 |

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² At maximum T_c = 75°C / 10% failure rate | ³ Recommended retail price excl. VAT

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Recommended retail price excl. VAT