



LED SUSPENSION LIGHT

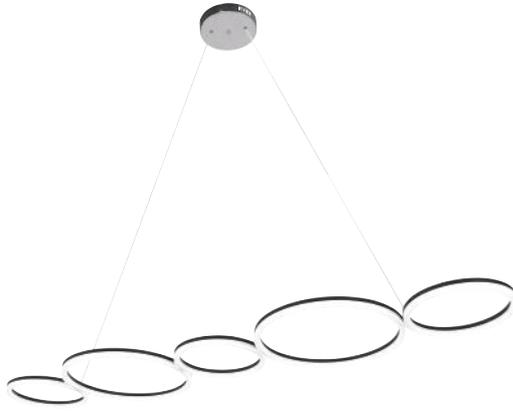


BLACK

Technical Drawing

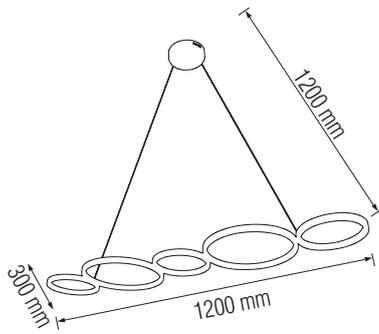

Photometric Diagram

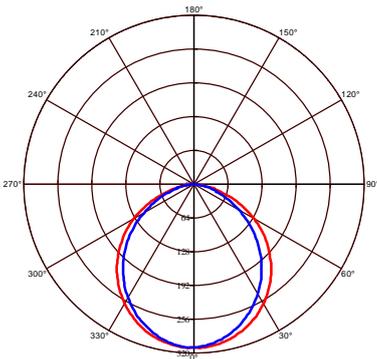

C00 Plane beam angle(50%):109.5(DEG) C90 Plane beam angle(50%):99.1(DEG)

Product&Family Code: 019 035 0045

OLYMPIC

Technical Data

| | |
|--|----------------------------|
| Voltage (V) | 180-240 |
| Product Wattage (W) | 45 |
| Equivalence with incandescent lamp(W) | 360 |
| Colour Render Index (Ra) | >Ra80 |
| Colour Temperature (K) | 4000K |
| Materials | Aluminium + Iron + Acrylic |
| Protection Class | I |
| Dimmable | No |
| EEL | A to A++ |
| Warm-up time up to 60 % of the full light output | Instant Full Light |
| Luminous Flux (lm) | 2025 |
| Luminous Efficacy (lm/W) | 45 |
| Rated Life (hrs) ⌚ | 30.000 |
| IP Rating | 20 |
| Power Factor | >0.5 |
| Beam Angle | 120° |

Applications

- LED Suspension Light has been specifically designed for use indoors and is ideal for both hospitality and residential lighting.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base
- Very low energy consumption

