


33361 AQILO IP65 DSO-B

Ceiling-mounted spotlight fitting

5905339333612

IP
65

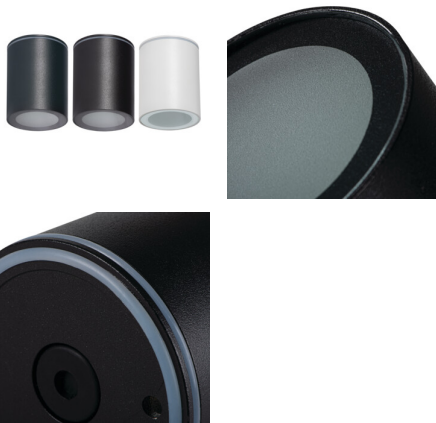

KANLUX AQILO represents our first surface-mounted luminaire with an IP65 rating. It is characterised by simple design and available in three colours: white, black and graphite. The high tightness is intended for rooms where lamps are exposed to increased humidity and the risk of flooding with water, e.g. bathrooms and kitchens as well as external areas of the house, such as terraces, balconies or covered entrances. Choose your own light source to match the Kanlux AQILO lamps.

GENERAL DATA:

Colour: black

Place of assembly: ceiling mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Height [mm]: 90

Diameter [mm]: 70

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 7

Class of protection against electric shock: I

Lampshade material: plastic

Light source: PAR16 LED

Light source included: no

Cap: GU10

Ambient temperature range to which the product can be exposed: -20÷35

Enclosure material: aluminum alloy

Connection type: Bolt terminal block

IP class: 65

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 254

Grammage [g]: 298.4


Length of a unit pack [cm]: 10

Width of a unit pack [cm]: 8

Height of a unit pack [cm]: 8

Weight of a cardboard box [kg]: 14.92

Ceiling-mounted spotlight fitting



Width of a cardboard box [cm] : 17

Height of a cardboard box [cm] : 42

Length of a cardboard box [cm] : 52

Volume of a cardboard box [m³] : 0.037128

KANLUX S.A. (kat 33361) AQILO IP65 DSO-B + IQ-LED / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33361) AQILO IP65 DSO-B + IQ-LED
Lampe: 1 x IQ-LED GU10 6,5W/WW

