

29593 AREL LED DO 20W-WW

Downlight fitting

5905339295934













Kanlux AREL LED is a new family of downlights which do not have frame. High tightness class IP65/20 and exceptional, simple, and at the same time surprising design make Kanlux AREL LED fit into each interior. Thanks to the unique structure, the panel is only 9 mm thick - it is the thinnest panel available on the market.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-

insulating material: yes

Height [mm]: 23 Diameter [mm]: 186

Assembly hole [mm]: Ø170 **Integrated LED light source**: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 20

Class of protection against electric shock: ||

Lampshade material: PMMA

Diode type: LED SMD Luminous flux [Im]: 1450

Useful luminous flux of the light source Φ use [lm]: 2300 Useful luminous flux of the light source Φ use [lm]: in

sphere (360°)

Colour temperature: Warm white

Correlated colour temperature [K]: 3000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 15000

Number of on/off cycles: ≥30000

Lighting angle [°]: 120

Luminous efficiency of the lamp [lm/W]: 73

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: aluminum alloy Connection type: Terminal block

Range of sections of wires used [mm²]: 0,75-1,5

Lamp-heating time [s]: ≤ 1

Date of issue: 16.11.2022, 05:28


We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





29593 AREL LED DO 20W-WW

Downlight fitting





Lamp-ignition time [s]: ≤ 0.5

IP class: 65/20

LOGISTIC DATA:

Packaging method: 50


Number of units in the secondary packaging: $\boldsymbol{1}$

Number of units in the packaging: 50

Net unit weight [g]: 314 Grammage [g]: 409

Length of a unit pack [cm]: 21.5 Width of a unit pack [cm]: 3 Height of a unit pack [cm]: 23

Weight of a cardboard box [kg]: 20.45 Width of a cardboard box [cm]: 45 Height of a cardboard box [cm]: 25.5 Length of a cardboard box [cm]: 78 Volume of a cardboard box [m³]: 0.089505

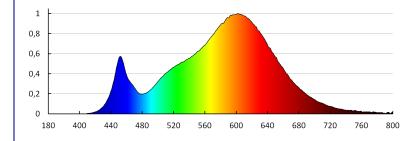

KANLUX S.A. (kat 29593) AREL LED DO 20W-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 29593) AREL LED DO 20W-WW Lamps: 1 x AREL LED DO 20W-WW

